



FX-54 ATTACKER


Sample settings for the FX-54

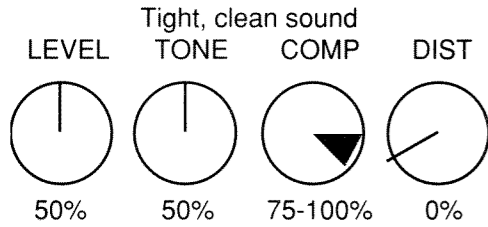


Use this setting for a smooth, clean tone. Use your bridge and middle pickup for a country type sound.

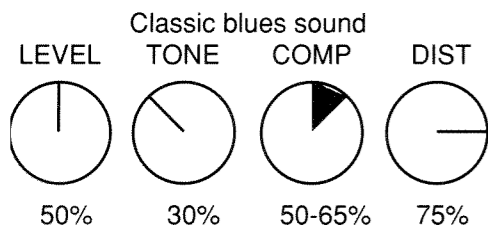

This setup will give you a classic Jimi Hendrix or Stevie Ray Vaughan sound, especially if using your neck pickup.

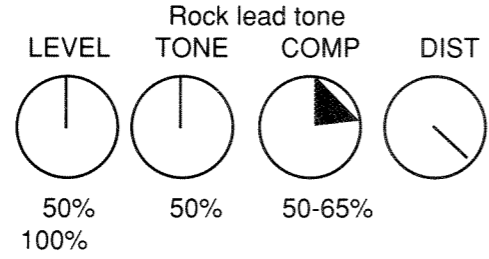

This is a standard rock solo type sound.

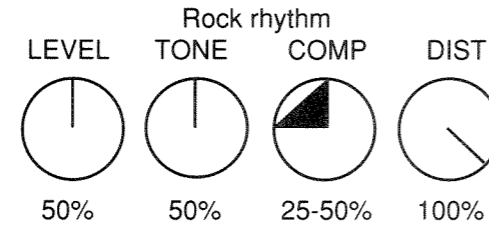

For the rhythm sounds found in many rock bands today.

Important Notes

- When you're not going to use your FX-54, be sure to unplug the INPUT jack so as not to waste the battery.
- If you are not going to use your FX-54 for an extended period of time, remove the battery to avoid possible damage to the unit from leaking battery fluids.
- When the FX-54 fails to switch in or out, or if the LED indicator stays lit (even dimly) the battery is probably low and needs to be replaced.
- It is recommended that a fresh battery be kept in the battery compartment while you're using the FX-54 so that if the A.C. adapter should come out, your FX-54 will still operate.
- The use of any other A.C. adapter other than a DOD PS-50 will void the warranty of this product.
- Unauthorized repair of this pedal will void the warranty. Should your FX-54 require service, contact your DOD dealer for return/repair information.
- The FX-54 is a very high gain unit. If you experience feedback or squealing noises, you may need to vary the controls of the FX-54, your guitar volume, or possibly your amplifier volume.

DOD Electronics Corporation

8760 Sandy Parkway
Sandy, UT 84070

Telephone (801) 566-8800
FAX (801) 566-7005

International FAX (603) 672-4246

H A Harman International Company

Copyright 1991 DOD Electronics Corp.

The specifications in this manual are subject to change without notice.

Printed in USA


Made in USA

Introducing the FX-54 Attacker Compression + Distortion Pedal

The FX-54 Attacker, Compressor + Distortion pedal, simultaneously combines a smooth, tight compressor with a wide range distortion. Unlimited guitar sounds may be had ranging from a warm Larry Carlton type sound, to a bright, hard rock sound like Joe Satriani.

Connecting the FX-54

Connect the INPUT of the FX-54 to your guitar with a 1/4" mono phone plug. Connect the OUTPUT to your amplifier (or to the INPUT of another effects device) with a 1/4" mono phone plug. To eliminate the need for a 9-volt battery, connect the DOD PS-50 to the 3.5mm A.C. adapter jack.

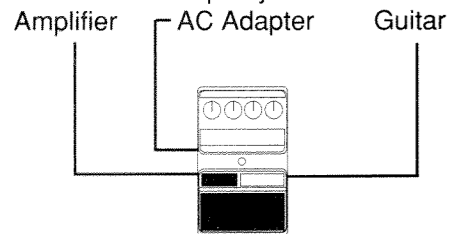

Features

The FX-54 creates various guitar tones from a mildly distorted sound to a harsh rock-n-roll grind. With the addition of the compressor, the FX-54 has the ability to sustain longer than just a distortion pedal alone. This results in longer, and more controlled feedback effects, tight rhythms, and smooth bluesy solos.

The FX-54 Attacker also features:

- FET switching for "clickless" insertion into the signal path.
- LED indicator shows the status of the effect and battery condition.
- No tools, easy access battery compartment.
- Rugged die cast metal case.
- Three year limited warranty.

Controls

LEVEL: Adjusts the amount of distortion signal to the output. Turning the LEVEL clockwise increases the amount of distorted signal. This control is used to match the level of the distorted signal with the original signal level.

TONE: Modifies the tone or EQ of the distorted signal. When the TONE control is straight up, the distortion signal is unchanged or the equalization curve is flat. Turning the TONE control clockwise boosts the high frequencies, and turning the control counter-clockwise boosts the lower frequencies of the distorted signal.

COMPRESSION: Varies the amount of compression and sustain occurring to the effect signal. Turning this control clockwise increases the compression amount and results in a tighter sound with longer sustain. Turning the control counter-clockwise lowers the compression and turning it full counter-clockwise is a virtual bypass of the compressor.

DISTORTION: Adjusts the amount of distortion added to the input signal. Turning this control clockwise increases the internal gain of the FX-54 resulting in a more distorted signal.

FOOTSWITCH: Switches the distortion effect in or out of the signal path.

LED INDICATOR: Lights up when the distortion is enabled.

DOD Warranty

1. The warranty registration card must be mailed within ten days after purchase date to validate this warranty.
2. DOD warrants this product, when used solely within the U.S., to be free from defects in material and workmanship under normal use and service.
3. DOD Electronics liability under this warranty is limited to repairing or replacing defective materials that show evidence of defect, provided the product is returned through the original dealer, where all parts and labor will be covered up to a period of three years. The company shall not be liable for any

consequential damage as a result of the products use in any circuit or assembly.

4. Proof of date of purchase is considered to be the burden of the consumer.
5. If this product is battery operated: Batteries are not covered by this warranty. Please remove weak or dead batteries in order to prevent corrosion damage.
6. DOD reserves the right to make changes in design or make additions to or improvements upon this product without incurring any obligation to install the same on PRODUCTS PREVIOUSLY MANUFACTURED.
7. The foregoing is in lieu of all other warranties, expressed or implied, and DOD neither assumes nor authorizes any person to assume for it any obligation or liability in connection with the sale of this product. In no event shall DOD or its dealers be liable for special or consequential damages or from any delay in the performances or this warranty due to causes beyond their control.